

## DC Input, Schmitt Trigger Photo Coupler

### Description

The SLH11LX series combine an AlGaAs infrared emitting diode as the emitter which is optically coupled to a Schmitt Trigger detector in a plastic DIP6 package with different lead forming options.


### Features

- High isolation 5000 VRMS
- DC input with Schmitt trigger output
- Operating temperature range - 55 °C to 100 °C
- REACH & RoHS compliance
- MSL class 1
- Regulatory Approvals
  - UL - UL1577
  - VDE - EN60747-5-5(VDE0884-5)
  - CQC - GB4943.1, GB8898
  - cUL- CSA Component Acceptance Service Notice No. 5A

### Applications

- Logic to logic isolator
- Programmable current level sensor
- Line receiver – eliminate noise and transient problems
- AC to TTL conversion – square wave shaping
- Digital programming of power supplies
- Interfaces computers with peripherals


### SCHEMATIC

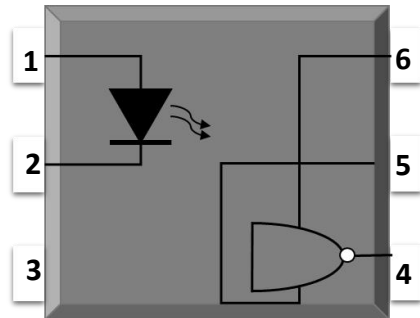


### PIN DEFINITION

- |            |         |
|------------|---------|
| 1. Anode   | 6. VCC  |
| 2. Cathode | 5. GND  |
| 3. NC      | 4. VOUT |

### PACKAGE OUTLINE



DIP-6 SLH11Lx



SMD-6 SLH11LxS

| ABSOLUTE MAXIMUM RATINGS |           |         |      |      |
|--------------------------|-----------|---------|------|------|
| PARAMETER                | SYMBOL    | VALUE   | UNIT | Note |
| INPUT                    |           |         |      |      |
| Forward Current          | IF        | 60      | mA   |      |
| Peak Transient Current   | IF(trans) | 1       | A    | 1    |
| Reverse Voltage          | VR        | 6       | V    |      |
| Input Power Dissipation  | PI        | 120     | mW   |      |
| OUTPUT                   |           |         |      |      |
| Supply Voltage           | VCC       | 3 to 16 | V    |      |
| Output Voltage           | VO        | 0 to 16 | V    |      |
| Output Current           | IO        | 50      | mA   |      |
| Output Power Dissipation | PO        | 150     | mW   |      |
| COMMON                   |           |         |      |      |
| Total Power Dissipation  | Ptot      | 250     | mW   |      |
| Isolation Voltage        | Viso      | 5000    | Vrms | 2    |
| Operating Temperature    | Topr      | -55~100 | °C   |      |
| Storage Temperature      | Tstg      | -55~150 | °C   |      |
| Soldering Temperature    | Tsol      | 260     | °C   | 3    |

Note 1.  $\leq 1\mu\text{s}$  P.W,300pps


Note 2. AC For 1 Minute, R.H. = 40 ~ 60%

Note 3. For 10 seconds


| <b>ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C</b> |          |                  |                  |      |      |                                     |                 |
|--|----------|------------------|------------------|------|------|-------------------------------------|-----------------|
| PARAMETER  | SYMBOL   | MIN.             | TYP.             | MAX. | UNIT | TEST CONDITION                      | NOTE            |
| <b>INPUT</b>   |          |                  |                  |      |      |                                     |                 |
| Forward Voltage                                      | VF       | -                | 1.24             | 1.5  | V    | IF=10mA                             |                 |
| Reverse Current                                      | IR       | -                | -                | 10   | μA   | VR=5V                               |                 |
| Input Capacitance                                    | Cin      | -                | 60               | -    | pF   | V=0, f=1MHz                         |                 |
| <b>OUTPUT</b>  |          |                  |                  |      |      |                                     |                 |
| Operation Voltage Range                              | VCC      | 3                | -                | 15   | V    |                                     |                 |
| Off State Supply Current                             | ICC(off) | -                | 1.6              | 5    | mA   | IF=0mA, VCC=5V                      |                 |
| On State Supply Current                              | ICC(on)  | -                | 1.6              | 5    | mA   | IF=10mA, VCC=5V                     |                 |
| High Level Output Current                            | IOH      | -                | -                | 100  | μA   | IF=10mA, VCC=VO=15V                 |                 |
| <b>TRANSFER CHARACTERISTICS (Ta=-40 to 85°C)</b>     |          |                  |                  |      |      |                                     |                 |
| Low Level Output Voltage                             | VOL      | -                | 0.35             | 0.6  | V    | VCC=5.5V, IF=5mA, VE=2.0V, ICL=13mA |                 |
| Turn On Threshold Current                            | SLH11L1  | IFon             | -                | -    | 1.6  | mA                                  | VCC=5V, RL=270Ω |
|  | SLH11L2  |                  | -                | -    | 10   |                                     |                 |
|  | SLH11L3  |                  | -                | -    | 5    |                                     |                 |
| Turn Off Threshold Current                           | IFoff    | -                | 1                | -    | mA   | VCC=5V, RL=270Ω                     |                 |
| Turn On Time   | ton      | -                | -                | 4    | μs   | VCC=5V, IF=IFon, RL=270Ω            |                 |
| Fall Time  | tr       | -                | 0.1              | -    | μs   |                                     |                 |
| Turn Off Time  | toff     | -                | -                | 4    | μs   |                                     |                 |
| Rise Time  | tr       | -                | 0.1              | -    | μs   |                                     |                 |
| Data Rate  |          | -                | 1                | -    | MHz  |                                     |                 |
| Isolation Resistance                                 | Riso     | 10 <sup>12</sup> | 10 <sup>14</sup> | -    | Ω    | DC500V, 40 ~ 60% R.H.               |                 |
| Floating Capacitance                                 | CIO      | -                | 0.3              | 1    | pF   | V=0, f=1MHz                         |                 |

## CHARACTERISTIC CURVES


**Fig.1 Forward Current vs. Forward Voltage**

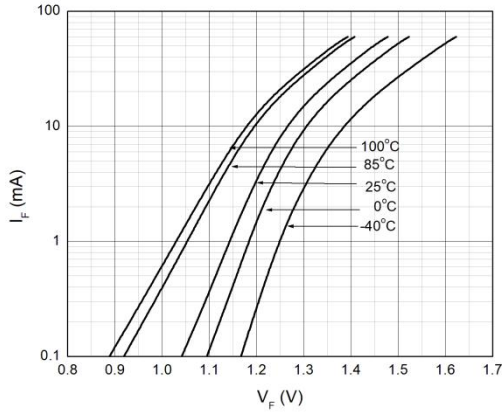


**Fig.2 Output Voltage vs. Forward Current**

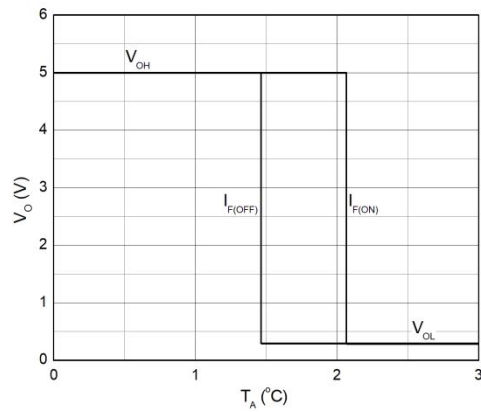


**Fig.3 Normalized Turn on Threshold Current vs. Supply Voltage**

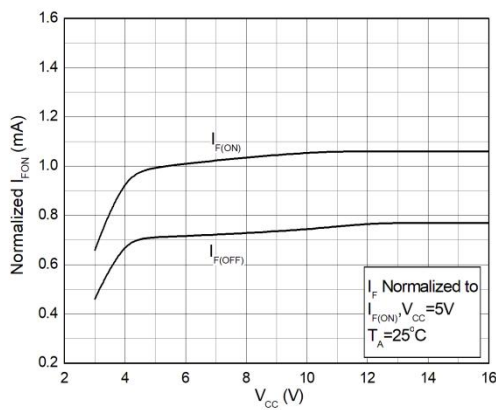


**Fig.4 Normalized Turn on Threshold Current vs. Ambient Temperature**

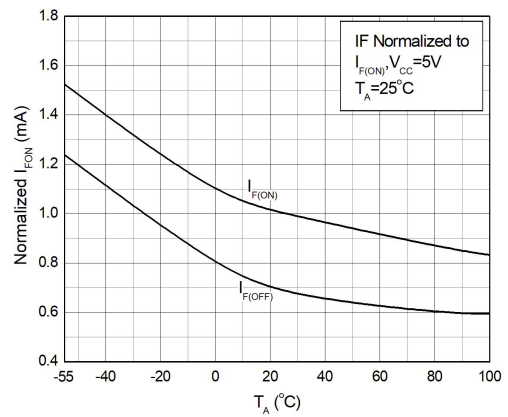

**Fig.5 Low Level Output Voltage vs. Load Current**

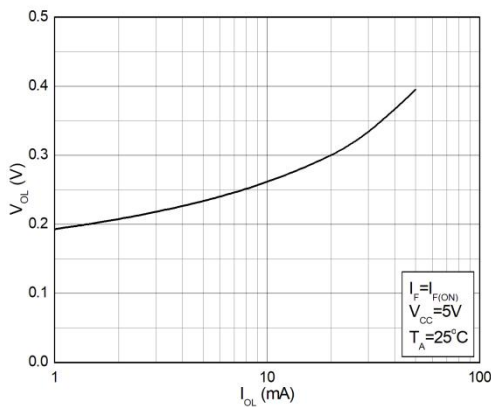


**Fig.6 Supply Current vs. Supply Voltage**

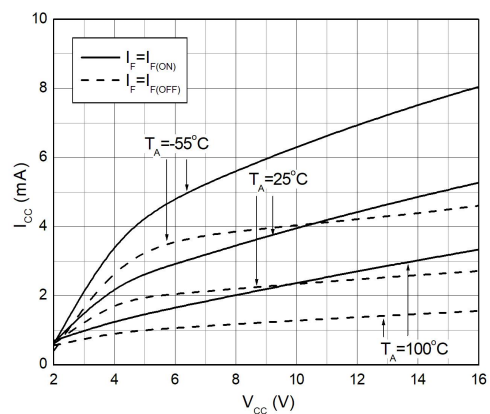


## PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)

### Standard DIP – Through Hole (DIP-6 Type)

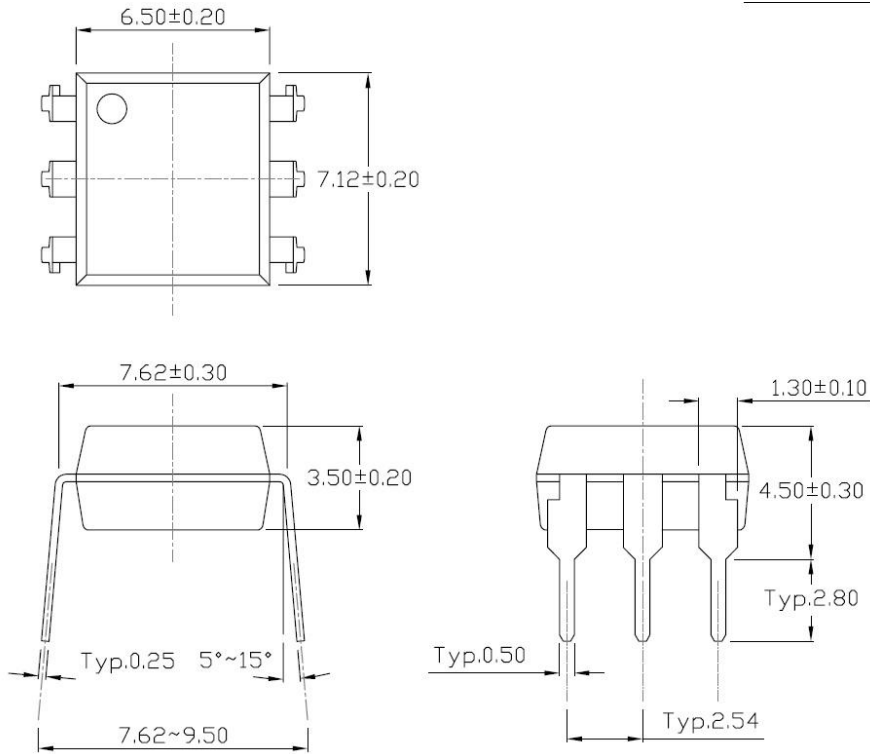


### Surface Mount (Low Profile) Lead Forming (SMD-6 Type)

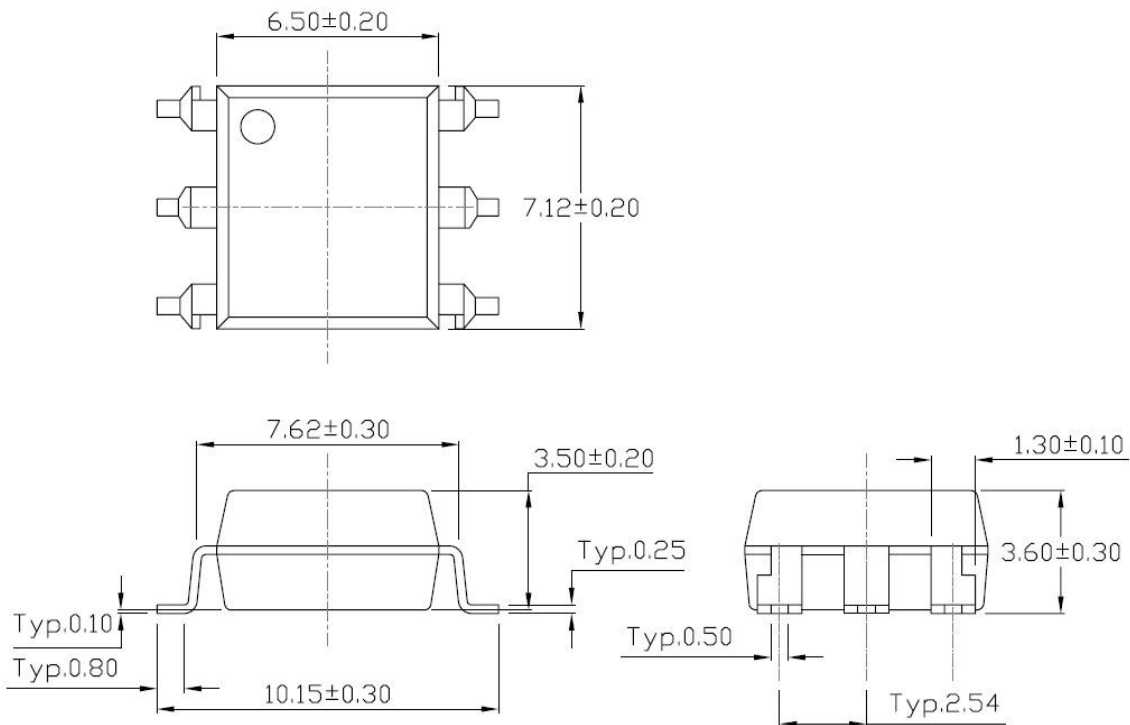


## RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

### Surface Mount Lead Forming & Surface Mount (Low Profile) Lead Forming

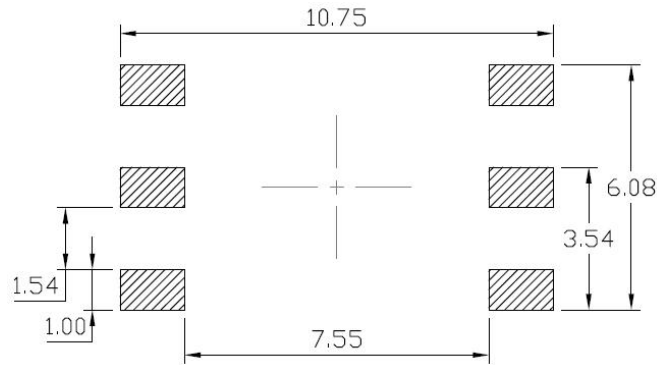


### Surface Mount (Gullwing) Lead Forming

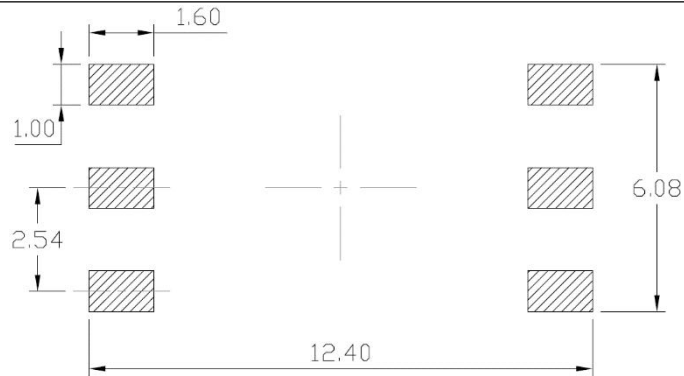

## REFLOW INFORMATION

### REFLOW PROFILE

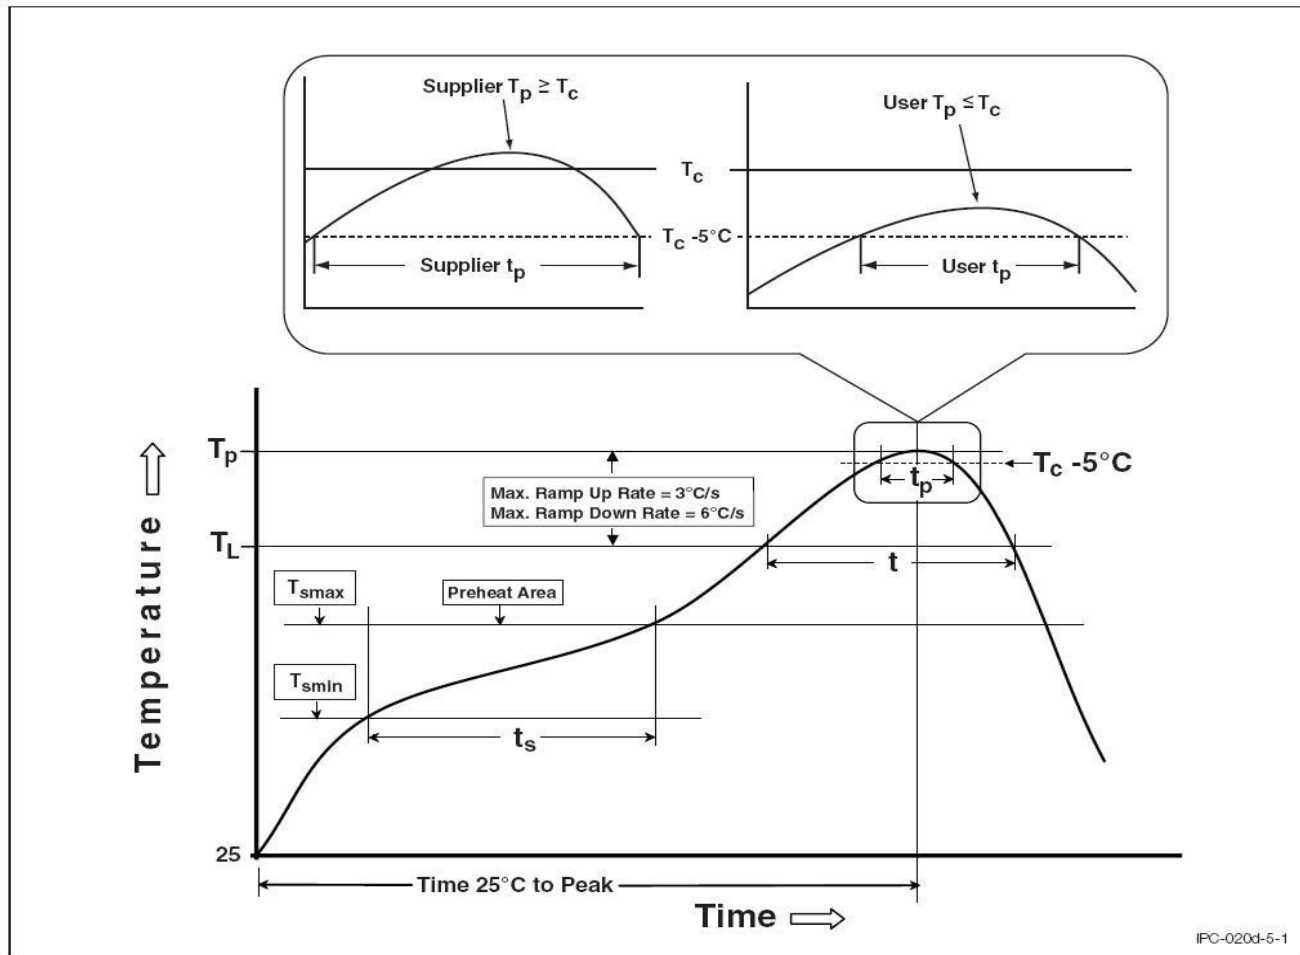

| Profile Feature                                  | Sn-Pb Assembly Profile | Pb-Free Assembly Profile |
|--|------------------------|--------------------------|
| Temperature Min. ( $T_{smin}$ )                  | 100                    | 150°C                    |
| Temperature Max. ( $T_{smax}$ )                  | 150                    | 200°C                    |
| Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ ) | 60-120 seconds         | 60-120 seconds           |
| Ramp-up Rate ( $t_L$ to $t_P$ )                  | 3°C/second max.        | 3°C/second max.          |
| Liquidous Temperature ( $T_L$ )                  | 183°C                  | 217°C                    |
| Time ( $t_L$ ) Maintained Above ( $T_L$ )        | 60 – 150 seconds       | 60 – 150 seconds         |
| Peak Body Package Temperature                    | 235°C +0°C / -5°C      | 260°C +0°C / -5°C        |
| Time ( $t_P$ ) within 5°C of 260°C               | 20 seconds             | 30 seconds               |
| Ramp-down Rate ( $T_P$ to $T_L$ )                | 6°C/second max         | 6°C/second max           |
| Time 25°C to Peak Temperature                    | 6 minutes max.         | 8 minutes max.           |